



1U Rackmount 16-channel
Video Server with Two Way Audio

ACD-2400



- Selectable MPEG-4/MJPEG compression
- CIF up to Full D1 resolution at 30/25 FPS (per channel)
- Multi-stream with variable frame rate in the same compression
- Two-way audio supported (per channel)
- Hardware motion detection, Digital Input / Output (per channel)
- Serial ports for each channel




- | | |
|---------------|------------------|
| ① Power LED | ⑤ Channel Number |
| ② LAN LED | ⑥ Reset Button |
| ③ RS-485 LED | ⑦ Ethernet Port |
| ④ Video Input | |



- | | |
|------------------|--|
| ⑧ AC Power Input | ⑩ Audio Input / Output &
Digital Input / Output & Serial Port |
| ⑨ Power Switch | |

DIMENSION DIAGRAM

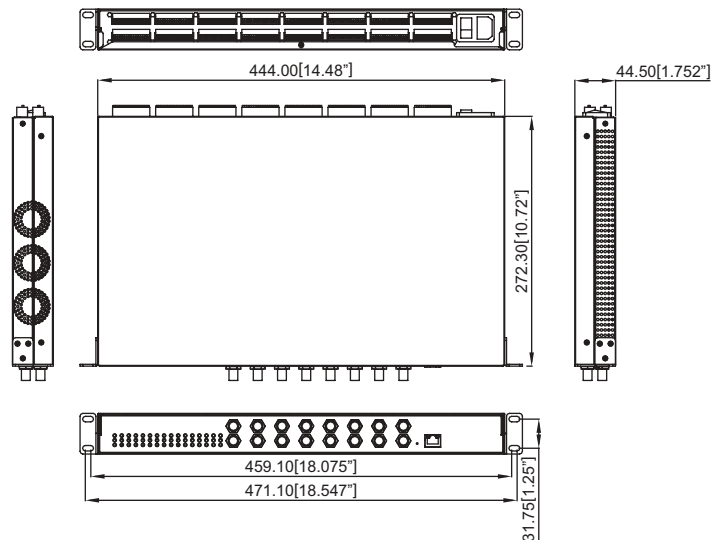

Unit: mm [inch]

**PRODUCT SPECIFICATION****Video Compression**

Compression	MPEG-4 SP, MJPEG selectable
Picture Resolution	Full D1 (720 x 480 in NTSC, 720 x 576 in PAL) VGA (640 x 480 in NTSC, 640 x 480 in Pal) CIF (352 x 240 in NTSC, 352 x 288 in PAL) QCIF (160 x 112 in NTSC, 176 x 144 in PAL) (per channel)
Bit Rate	28 K ~ 3 M bps (per channel)
Image Frame Rate	30fps at full D1 resolution (NTSC) 25fps at full D1 resolution (PAL)
Multi-stream	Up to 2 configurable frame rate/bit rate streams for preview and recording (per channel)

Video Input

Composite Input	16, CVBS, 1.0Vp-p with 75Ω loading, BNC connector
-----------------	---

Video Output

Composite Output	N/A
------------------	-----

Audio Input

Compression	8kHz, Mono, PCM
Audio Line Input	16, Unbalanced, 1.4Vp-p, 1Vrms, terminal block

Audio Output

Compression	8kHz, Mono, PCM
Audio Line Output	16, Unbalanced, 1.4Vp-p, 1Vrms, terminal block

Alarm

Digital Input	2, TTL, Terminal Block (per channel)
Digital Output	2, TTL, Terminal Block (per channel)

Remote Control

Serial Port	RS-485: Half Duplex, terminal block RS-422: Full Duplex, terminal block RS-232**: Full Duplex, terminal block (per channel)
-------------	--

External I/O

Reset Button	Factory default
LED	System Status (per channel)

Network

Ethernet Port	Ethernet(10/100 Base-T), RJ-45 connector
Protocol	TCP, UDP, IP, HTTP, DHCP, PPPoE, RTP, RTSP, FTP, SMTP, DNS, DDNS, NTP, ICMP, IGMP, ARP

Software

Web Browser	Microsoft Internet Explorer 6.0 or above
SDK	ACTi SDK-10000

PTZ Protocol*	Pelco-D, Pelco-P V1 and V2, Dynacolor, Sony VISCA, American Dynamics
---------------	--

Security	Password protection: configured by the administrator
----------	--

Operating

Temperature	0 °C ~ 50 °C (32 °F ~ 122 °F)
-------------	-------------------------------

Power

Power Requirement	AC 100 ~ 240V 50 / 60 Hz
Power Consumption	87 W

Physical

Dimensions (WxHxD)	444 mm x 44.5 mm x 272 mm (17.48" x 1.75" x 10.72")
Weight	4.3 kg (9.47 lb)

Approvals

Certificate	CE, FCC
-------------	---------

* These PTZ protocols are supported in ACTi NVR and Streaming Explorer
** Adjust by inside jumper