




## ACTi Indoor IP Dome Security Camera (RJ45)



**ACM-3601 Price: \$355.00**

- 1/3" Micron Progressive Scan CMOS
- Integrated with f3.6mm / F1.8 fixed lens
- 0.5 Lux at F1.0
- Shutter Speed, White Balance, Exposure, Gain Controls supported
- Selectable MPEG-4 / MJPEG compression
- Multi-stream with variable frame rate in the same compression
- VGA resolution at 30 FPS
- Hardware motion detection
- Support Power over Ethernet (IEEE 802.3af) only
- Rugged RJ45 Ethernet connector
- Weatherproof and vandal proof with IP66 protection

Image	Size	1/3"
	Effective Pixels	640h x 480v
Min. scene Illumination	Color	0.5 Lux at F1.0 (2400K, 30 IRE)
Lens	Lens	f3.6mm / F1.8 Horizontal 85 Degrees
Synchronization	Sync. System	Internal
Camera Angle Adjustment	Panning / Tilting	20 Degrees / 0~90 Degrees
Functions	Motion Detection	Yes 3 windows
	Electronic Shutter	1~5 ~ 1/15,000 sec
	Fixed Shutter	1/30 ~ 1/1,000 sec (60Hz)
	Manual	1/25 ~ 1/1,000 sec (50Hz)
	Flikerless	1/120 sec (60Hz) 1/100 sec (50Hz)
	BLC	Yes
	AGC	Automatic (User defined)
S/N Ratio	White Balance	Auto, Indoor1, Indoor2, Outdoor1, Outdoor 2, Hold Current, Manual
	S/N Ratio	Better than 44 dB
	Compression	MPEG-4 SP / MJPEG
Video Compression	Picture Resolution	VGA (640x480) QVGA (320x240) QQVGA (160x112)
	Bit Rate	28K ~ 6M bps
	Image Frame Rate	30 fps at VGA
	Reset Button	Factory Default
External I/O	LED	System Status
	IP66 Rated	Weatherproof casing with IP66 standard
Casing	Vandal Proof	Vandal proof supports, durability up to 722.66 KgF
	Mount Type	Surface
	Ethernet	Ethernet(10/100 Base-T) Rugged RJ-45 connector
Network	Protocol	TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, IPv6
	Web Browser	Microsoft Internet Explorer 6.0 or above
Software	SDK	ACTi SDK-10000
	Security	Password Protection: Configured by the Administrator
Operating	Temperature	-20C ~ 50C (4F ~ 122F )
Power	Power Requirements	PoE (IEEE 802.3af) with Class 3
	Power Consumption	2.4W
	Dimensions	3.94" x 1.97"
Physical	Weight	0.48 lbs
	Certificate	CE, FCC, EN60950-1, EN55025, IP66, EN50155, ISO16750-3, Vibration

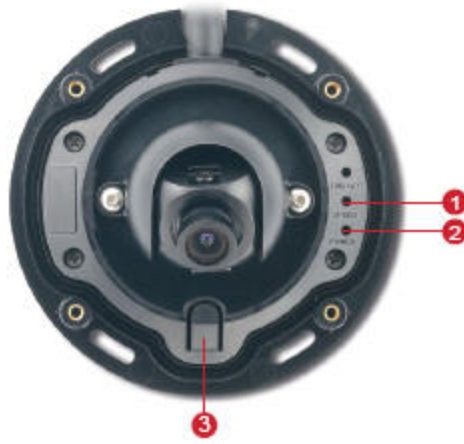

- 1 Ethernet Indicator LED
- 2 Power LED
- 3 Reset Button






Rugged RJ-45 Connector



Rugged M12 Connector

## DIMENSION DIAGRAM

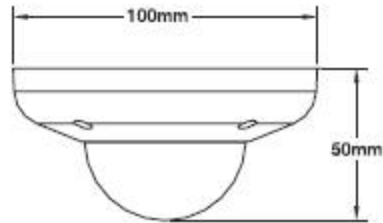

Unit: mm [inch]