



Security Camera World

Security you can count on

Indoor Vari-Focal Dome Camera





EL-720 Price: \$339.95

- **1/3" SSNR II Sony Super HAD CCD**
- **3.3-12mm Aspherical Extra-Low Dispersion Glass Vari-focal Lens**
- **Highly enhanced resolution of 540TVL(Day) & 570TVL(Night)**
- **0.3 Lux /F1.2 (50IRE, AGC High, DNR High) / 0.0002 Lux (Sens-up)**
- **Wide range of Automatic White Balance (1,800 K~ 10,500**
- **Dual switching power (w/Auto Line-lock) DC12V/AC24V**
- **3 Layer IR Filter**
- **Serve Ease Swappable Internal Camera Module**
- **1 year parts and labor warranty**

The EL720 is a 540TVL day/night indoor dome camera. It has a 3 layer IR filter resulting in color reproduction and improved picture quality overall. The EL720 incorporates an easy to use menu (via screen display) to adjust advanced camera settings to different applications. With a perfect picture and spot monitor output this dome makes for a quick and easy install and setup. The EL720 is color in 0.002 Lux (Sens-up).


To heighten its stability and constant operation the EL720 has surge voltage input protection, reverse polarity power input protection. It also features "Serve Ease" (Swappable Interface Module). This allows for the camera module to be removed for service or replacement without the housing in place.



Image Sensor	1/3" SSNR II Sony Super HAD CCD
	NTSC : 768(H)X494(V)
Effective Pixels	PAL : 752(H)X582(V)
	Note: PAL only available as special order.
H.Resolution	NTSC : 540TVL(Day) & 570TVL(Night))
Video output	1.0Vp-p Composite. 75 Ohms
Min. Illumination	0.3 Lux /F1.2 (50IRE, AGC High, DNR High) 0.0002 (Sens-Up)
Shutter Speed	AUTO : 1/60 ~ 1/100,000 sec (NTSC) 1/50 ~ 1/100,000 sec (PAL)
Scanning System	2:1 Interlace
S/N Ratio	50dB (AGC Off)
Lens	3.3-12mm Extra-Low Dispersion Glass Vari-focal Lens
OSD	Built-in
SNR	Low, Middle, High, Off Selectable (Super Noise Reduction)
Backlight Compensation	Low, Middle, High, Off Selectable
Gain Control	Low, Middle, High, Off Selectable
Mirror	ON/OFF
Sharpness	ON/OFF (Level Adjustable)
Privacy	ON/OFF (4 Zones)
Power source	AC24V / DC 12V
Operating current	At 12VDC : 200mA Max - (Tol.9VDC~30VDC)
Operation Temperature	-10 C to + 50 C
Operature Humidity	30% to 80% RH
Dimension	140mm(Diagonal) x 100mm (Vertical Height)
Weight (Approx.)	250g

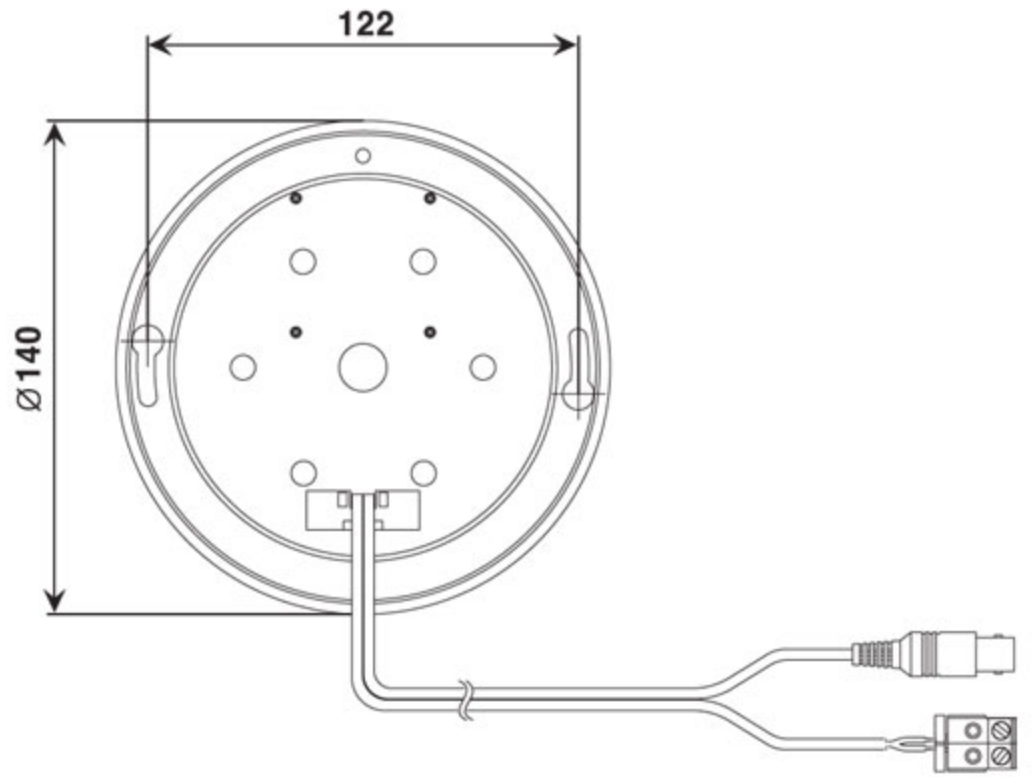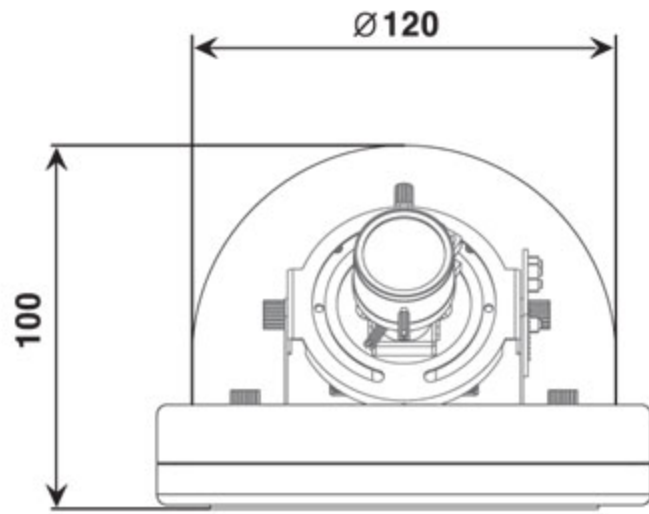



EL720 Name and function of each part

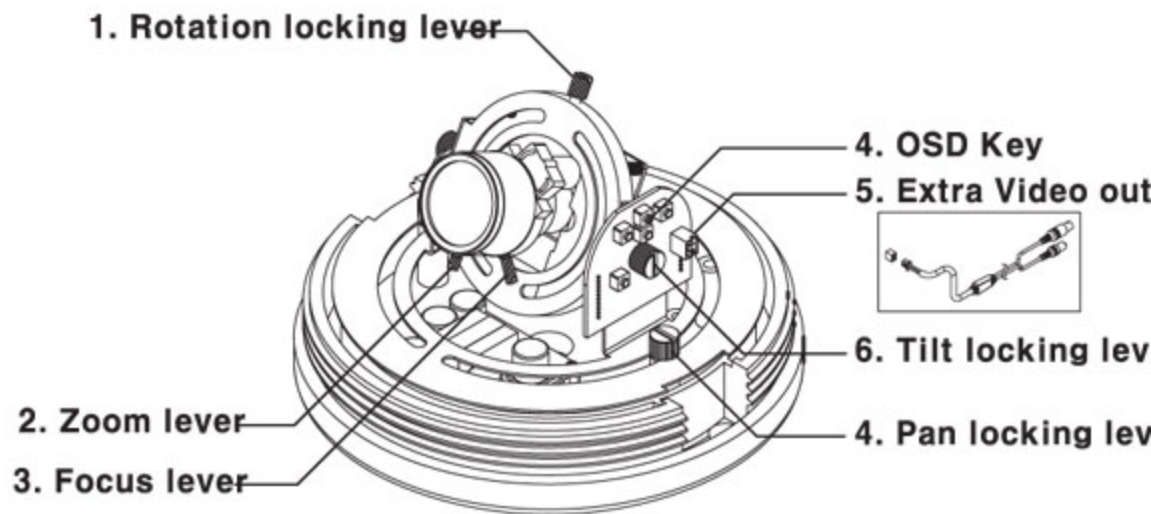

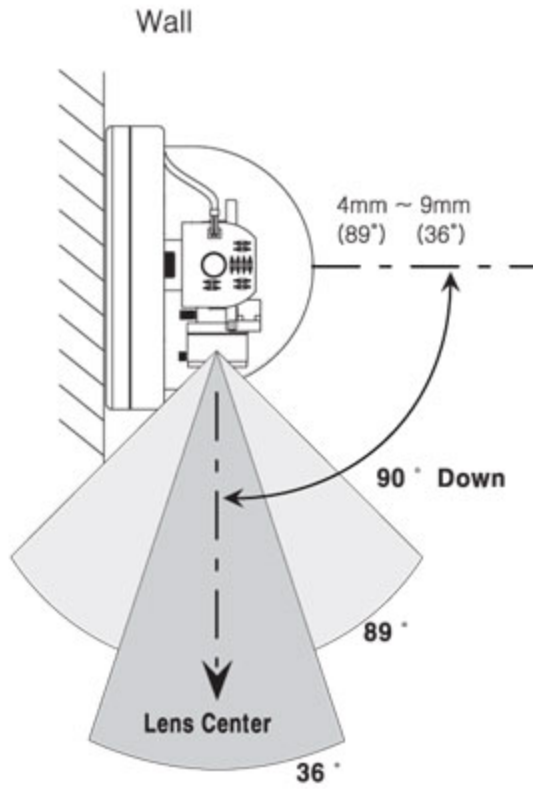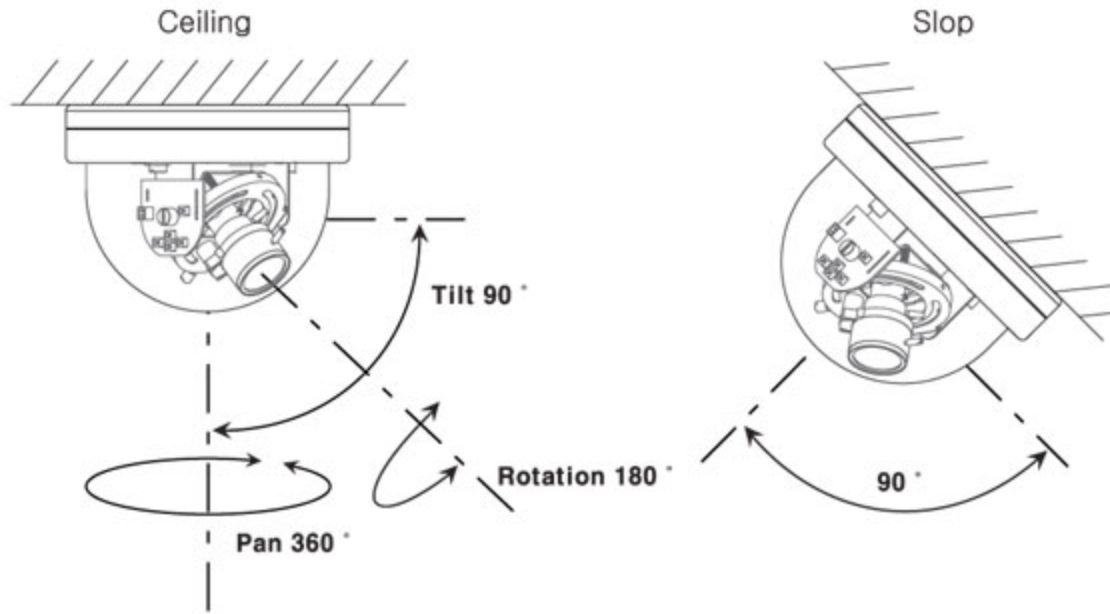

- Vertical angle can be tilt down to maximum 90 degree. (TILT = 90°)
- Horizontal angle is adjustable to its maximum 360 degree. (Horizontal = 360°)
- Rotation angle is adjustable to its maximum 180 degree. (Rotation = 180°)